



**EXAMINATION TABLE, HYDRAULIC ADJ. H. - 2 SECTIONS
COD. HT62**

Welded structure made of epoxy-painted tubular steel.

Two-section mattress made of high density polyurethane foam, thickness 50 mm, upholstered with fireproof and waterproof leatherette

Manually adjustable backrest from 0° to +80° through gas spring by means of bilateral lever.

Hydraulic height adjustment from 500 to 900 mm.


Base on 4 height adjustable feet.

Load capacity: 170 kg.

Dim. 1870x645x500/900 h mm

Position 1

Upholstery colours:

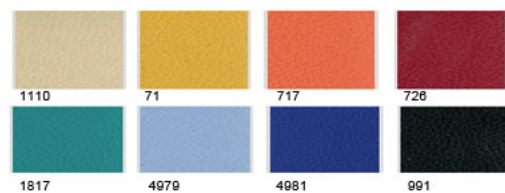

Rev. 00 del 03/02/2021

TECHNICAL SHEETS - - NR. /

